

ОМІ

Технические характеристики Рефрижераторные осушители

ОМІ ED до 20 м³/мин

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

www.omi.nt-rt.ru || oim@nt-rt.ru



TECHNICAL DATA SHEET

CODE:
08L.0018AG0.00B0
Rev.5A Pg.1/1

REFRIGERATED COMPRESSED AIR DRYER

MODEL:

ED 18 230/1/50

Rated capacity*



Flow rate	m ³ /h	18	
	l/min	300	
	cfm	10,6	
Inlet air temperature	°C / °F	35 / 95	(Max 55 / 131)
Outlet air temperature	°C / °F	27 / 81	(Max 47 / 117)
Ambient temperature	°C / °F	25 / 77	(Max 45 / 113)
Working pressure	bar / psi	7,0 / 101,5	(Max 16 / 232)
Pressure drop	bar / psi	0,02 / 0,29	(Max 0,34 / 4,93)
Pressure dew point	°C / °F	3 / 37	
Power supply	V/Ph/Hz	230/1/50	(±10% / -- / ±1)
Rated power consumption	kW	0,12	(Max 0,17)
Rated adsorption	A	0,9	(Max 1,04)
Lock Rotor Ampere	A	8,5	
Weight	Kg / Lbs	19 / 42	
Air connections	IN/OUT	3/8"BSP	
Coolant type	Freon	R134a	

Standard features

Control panel:	Electronic system type	Separator type:	Demister type
Condenser cooling:	Air cooled	Compressor type:	Hermetic type
Ventilator motor:	Pusher fan	Installation location:	Indoor
Heat exchanger:	Aluminium brazed plate	Drain discharge:	Timed solenoid valve
Expansion method:	Capillary tube	Electric protection:	IP 42

* Performances refer to air suction of FAD 20°C (68°F), 1 bar (14.5 psig), and the following operating conditions: 7 bar (100 psig) working pressure, 3°C (37°F) pressure dewpoint, 25°C (77°F) ambient temperature, 35°C (95°F) compressed air inlet temperature.

Performances & specifications: +/- 5%

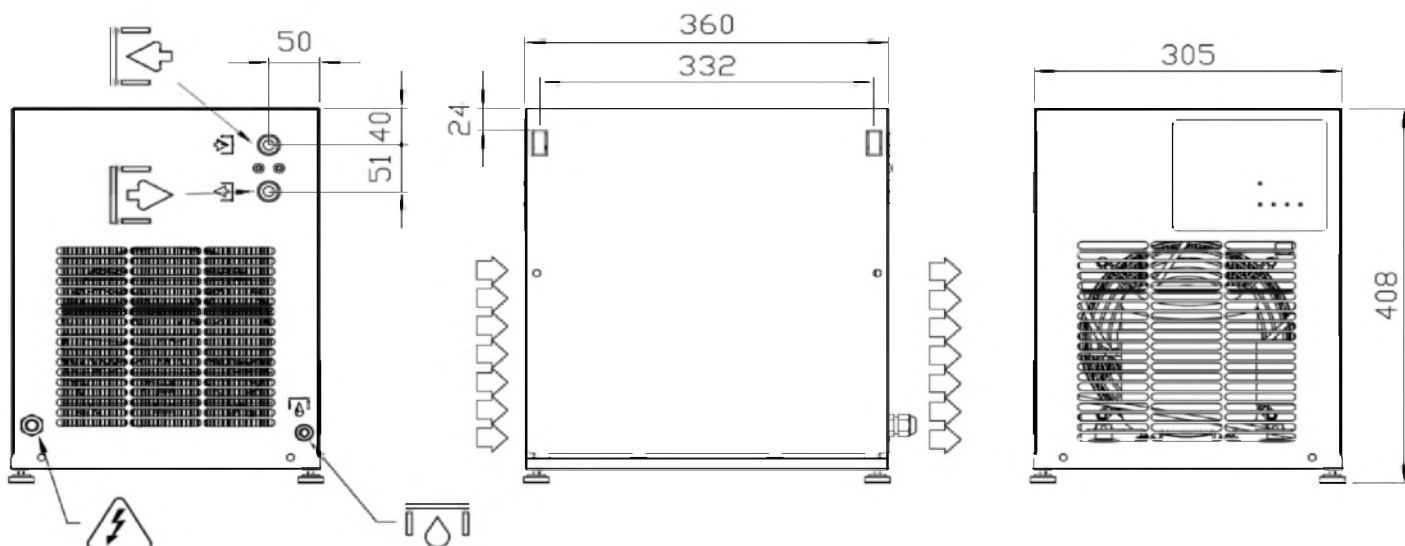



TECHNICAL DATA SHEET

CODE:
08L.0024AG0.00B0
Rev.5A Pg.1/1

REFRIGERATED COMPRESSED AIR DRYER

MODEL:

ED 24 230/1/50

Rated capacity*



Flow rate	m ³ /h	24	
	l/min	400	
	cfm	14,1	
Inlet air temperature	°C / °F	35 / 95	(Max 55 / 131)
Outlet air temperature	°C / °F	27 / 81	(Max 47 / 117)
Ambient temperature	°C / °F	25 / 77	(Max 45 / 113)
Working pressure	bar / psi	7,0 / 101,5	(Max 16 / 232)
Pressure drop	bar / psi	0,04 / 0,58	(Max 0,34 / 4,93)
Pressure dew point	°C / °F	3 / 37	
Power supply	V/Ph/Hz	230/1/50	(±10% / -- / ±1)
Rated power consumption	kW	0,12	(Max 0,17)
Rated adsorption	A	0,9	(Max 1,04)
Lock Rotor Ampere	A	8,5	
Weight	Kg / Lbs	19 / 42	
Air connections	IN/OUT	3/8"BSP	
Coolant type	Freon	R134a	

Standard features

Control panel:	Electronic system type	Separator type:	Demister type
Condenser cooling:	Air cooled	Compressor type:	Hermetic type
Ventilator motor:	Pusher fan	Installation location:	Indoor
Heat exchanger:	Aluminium brazed plate	Drain discharge:	Timed solenoid valve
Expansion method:	Capillary tube	Electric protection:	IP 42

* Performances refer to air suction of FAD 20°C (68°F), 1 bar (14.5 psig), and the following operating conditions: 7 bar (100 psig) working pressure, 3°C (37°F) pressure dewpoint, 25°C (77°F) ambient temperature, 35°C (95°F) compressed air inlet temperature.

Performances & specifications: +/- 5%

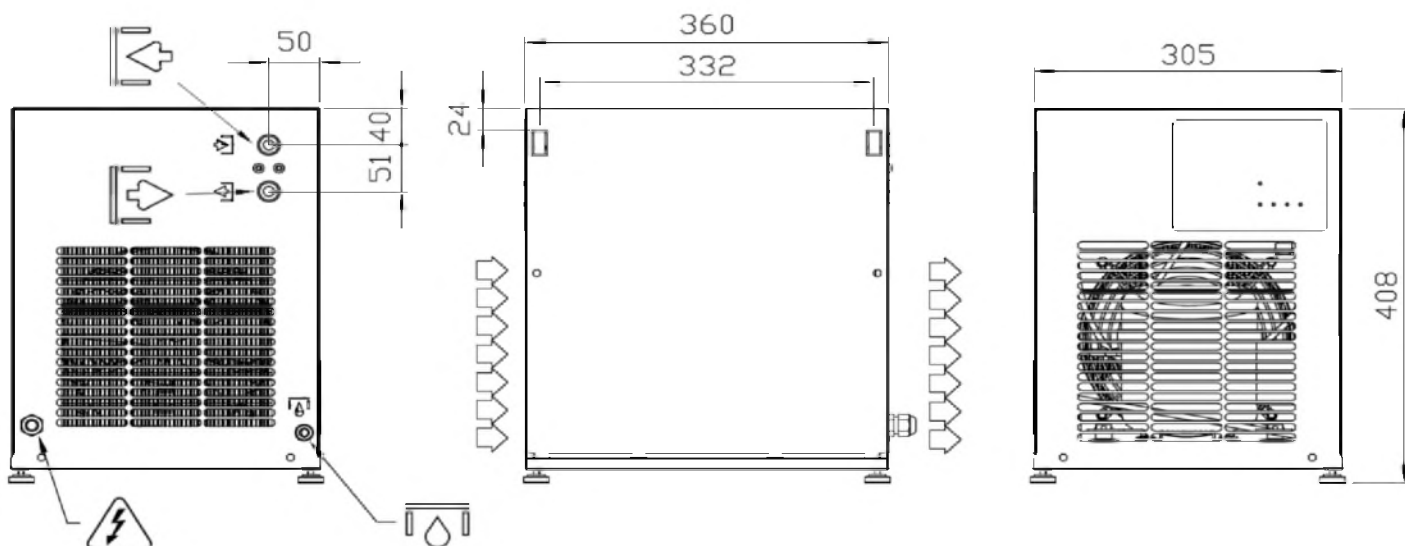



TECHNICAL DATA SHEET

CODE:
08L.0054AG0.00B0
Rev.5A Pg.1/1

REFRIGERATED COMPRESSED AIR DRYER

MODEL:

ED 54 230/1/50

Rated capacity*



Flow rate	m ³ /h	54	
	l/min	900	
	cfm	31,8	
Inlet air temperature	°C / °F	35 / 95	(Max 55 / 131)
Outlet air temperature	°C / °F	27 / 81	(Max 47 / 117)
Ambient temperature	°C / °F	25 / 77	(Max 45 / 113)
Working pressure	bar / psi	7,0 / 101,5	(Max 16 / 232)
Pressure drop	bar / psi	0,07 / 1,02	(Max 0,34 / 4,93)
Pressure dew point	°C / °F	3 / 37	
Power supply	V/Ph/Hz	230/1/50	(±10% / -- / ±1)
Rated power consumption	kW	0,14	(Max 0,22)
Rated adsorption	A	1,07	(Max 1,3)
Lock Rotor Ampere	A	8,9	
Weight	Kg / Lbs	26 / 57	
Air connections	IN/OUT	1/2"BSP	
Coolant type	Freon	R134a	

Standard features

Control panel:	Electronic system type	Separator type:	Demister type
Condenser cooling:	Air cooled	Compressor type:	Hermetic type
Ventilator motor:	Pusher fan	Installation location:	Indoor
Heat exchanger:	Aluminium brazed plate	Drain discharge:	Timed solenoid valve
Expansion method:	Capillary tube	Electric protection:	IP 42

* Performances refer to air suction of FAD 20°C (68°F), 1 bar (14.5 psig), and the following operating conditions: 7 bar (100 psig) working pressure, 3°C (37°F) pressure dewpoint, 25°C (77°F) ambient temperature, 35°C (95°F) compressed air inlet temperature.

Performances & specifications: +/- 5%

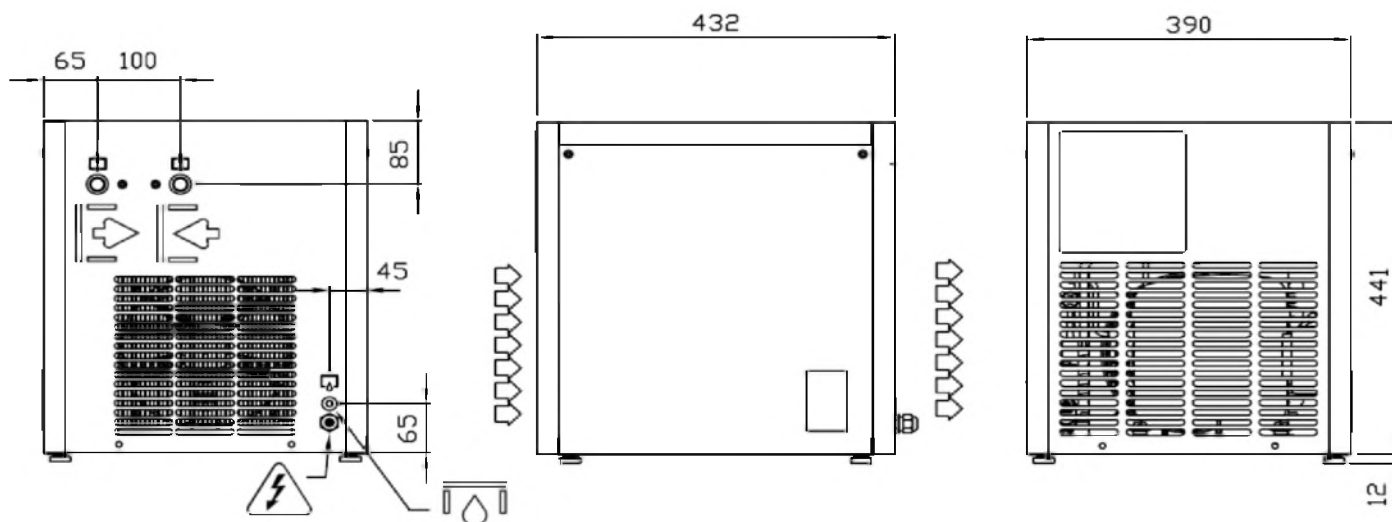



TECHNICAL DATA SHEET

CODE:
08L.0108AG0.00B0
Rev.5A Pg.1/1

REFRIGERATED COMPRESSED AIR DRYER

MODEL:

ED 108 230/1/50

Rated capacity*



Flow rate	m ³ /h	108	
	l/min	1800	
	cfm	63,6	
Inlet air temperature	°C / °F	35 / 95	(Max 55 / 131)
Outlet air temperature	°C / °F	27 / 81	(Max 47 / 117)
Ambient temperature	°C / °F	25 / 77	(Max 45 / 113)
Working pressure	bar / psi	7,0 / 101,5	(Max 16 / 232)
Pressure drop	bar / psi	0,07 / 1,02	(Max 0,34 / 4,93)
Pressure dew point	°C / °F	3 / 37	
Power supply	V/Ph/Hz	230/1/50	(±10% / -- / ±1)
Rated power consumption	kW	0,41	(Max 0,66)
Rated adsorption	A	2,49	(Max 3,4)
Lock Rotor Ampere	A	14	
Weight	Kg / Lbs	36 / 79	
Air connections	IN/OUT	3/4"BSP	
Coolant type	Freon	R134a	

Standard features

Control panel:	Electronic system type	Separator type:	Demister type
Condenser cooling:	Air cooled	Compressor type:	Hermetic type
Ventilator motor:	Pusher fan	Installation location:	Indoor
Heat exchanger:	Aluminium brazed plate	Drain discharge:	Timed solenoid valve
Expansion method:	Capillary tube	Electric protection:	IP 42

* Performances refer to air suction of FAD 20°C (68°F), 1 bar (14.5 psig), and the following operating conditions: 7 bar (100 psig) working pressure, 3°C (37°F) pressure dewpoint, 25°C (77°F) ambient temperature, 35°C (95°F) compressed air inlet temperature.

Performances & specifications: +/- 5%

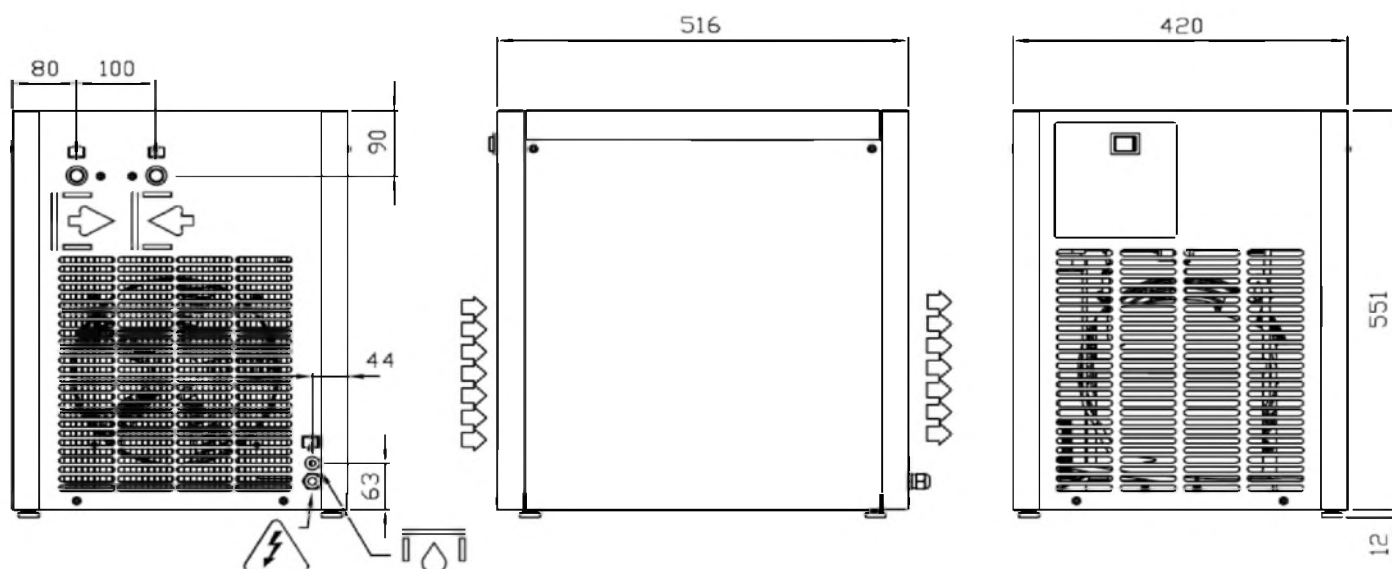



TECHNICAL DATA SHEET

CODE:
08L.0144AG0.00B0
Rev.5A Pg.1/1

REFRIGERATED COMPRESSED AIR DRYER

MODEL:

ED 144 230/1/50

Rated capacity*



Flow rate	m ³ /h	144	
	l/min	2400	
	cfm	84,8	
Inlet air temperature	°C / °F	35 / 95	(Max 55 / 131)
Outlet air temperature	°C / °F	27 / 81	(Max 47 / 117)
Ambient temperature	°C / °F	25 / 77	(Max 45 / 113)
Working pressure	bar / psi	7,0 / 101,5	(Max 16 / 232)
Pressure drop	bar / psi	0,13 / 1,89	(Max 0,34 / 4,93)
Pressure dew point	°C / °F	3 / 37	
Power supply	V/Ph/Hz	230/1/50	(±10% / -- / ±1)
Rated power consumption	kW	0,41	(Max 0,66)
Rated adsorption	A	2,49	(Max 3,4)
Lock Rotor Ampere	A	14	
Weight	Kg / Lbs	42 / 93	
Air connections	IN/OUT	3/4"BSP	
Coolant type	Freon	R134a	

Standard features

Control panel:	Electronic system type	Separator type:	Demister type
Condenser cooling:	Air cooled	Compressor type:	Hermetic type
Ventilator motor:	Pusher fan	Installation location:	Indoor
Heat exchanger:	Aluminium brazed plate	Drain discharge:	Timed solenoid valve
Expansion method:	Capillary tube	Electric protection:	IP 42

* Performances refer to air suction of FAD 20°C (68°F), 1 bar (14.5 psig), and the following operating conditions: 7 bar (100 psig) working pressure, 3°C (37°F) pressure dewpoint, 25°C (77°F) ambient temperature, 35°C (95°F) compressed air inlet temperature.

Performances & specifications: +/- 5%

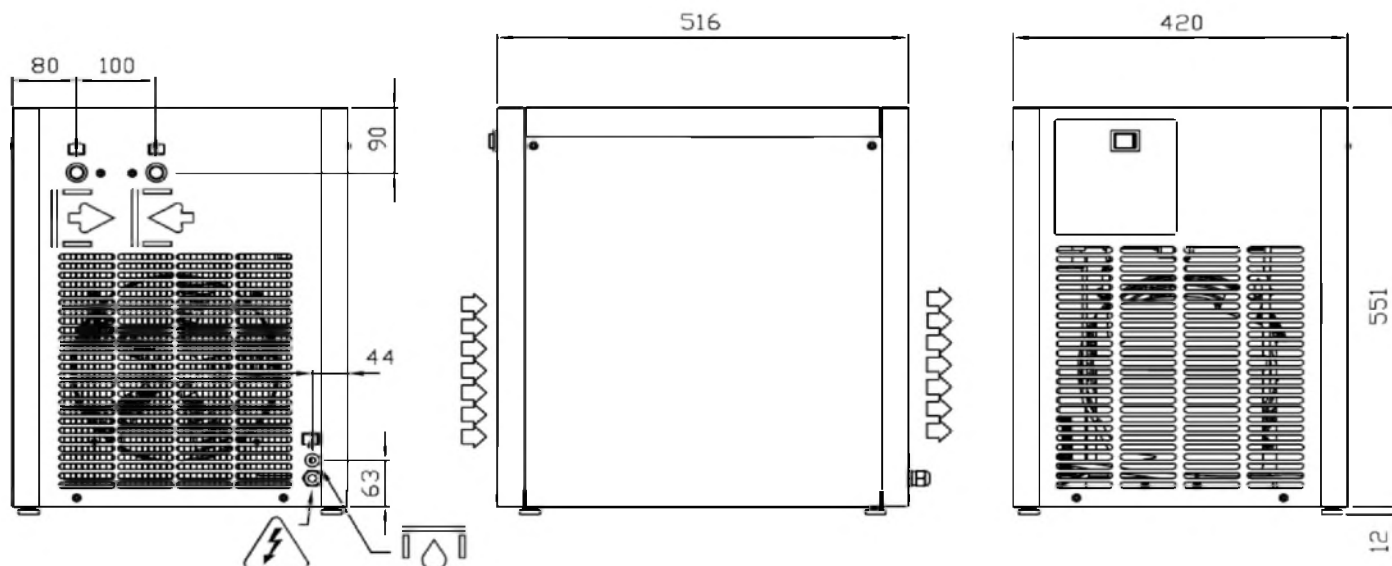



TECHNICAL DATA SHEET

CODE:
08L.0180AG0.00B0
Rev.5A Pg.1/1

REFRIGERATED COMPRESSED AIR DRYER

MODEL:

ED 180 230/1/50

Rated capacity*



Flow rate	m ³ /h	180	
	l/min	3000	
	cfm	105,9	
Inlet air temperature	°C / °F	35 / 95	(Max 55 / 131)
Outlet air temperature	°C / °F	27 / 81	(Max 47 / 117)
Ambient temperature	°C / °F	25 / 77	(Max 45 / 113)
Working pressure	bar / psi	7,0 / 101,5	(Max 16 / 232)
Pressure drop	bar / psi	0,21 / 3,05	(Max 0,34 / 4,93)
Pressure dew point	°C / °F	3 / 37	
Power supply	V/Ph/Hz	230/1/50	(±10% / -- / ±1)
Rated power consumption	kW	0,5	(Max 0,8)
Rated adsorption	A	4	(Max 4,75)
Lock Rotor Ampere	A	24	
Weight	Kg / Lbs	44 / 97	
Air connections	IN/OUT	3/4"BSP	
Coolant type	Freon	R134a	

Standard features

Control panel:	Electronic system type	Separator type:	Demister type
Condenser cooling:	Air cooled	Compressor type:	Hermetic type
Ventilator motor:	Pusher fan	Installation location:	Indoor
Heat exchanger:	Aluminium brazed plate	Drain discharge:	Timed solenoid valve
Expansion method:	Capillary tube	Electric protection:	IP 42

* Performances refer to air suction of FAD 20°C (68°F), 1 bar (14.5 psig), and the following operating conditions: 7 bar (100 psig) working pressure, 3°C (37°F) pressure dewpoint, 25°C (77°F) ambient temperature, 35°C (95°F) compressed air inlet temperature.

Performances & specifications: +/- 5%

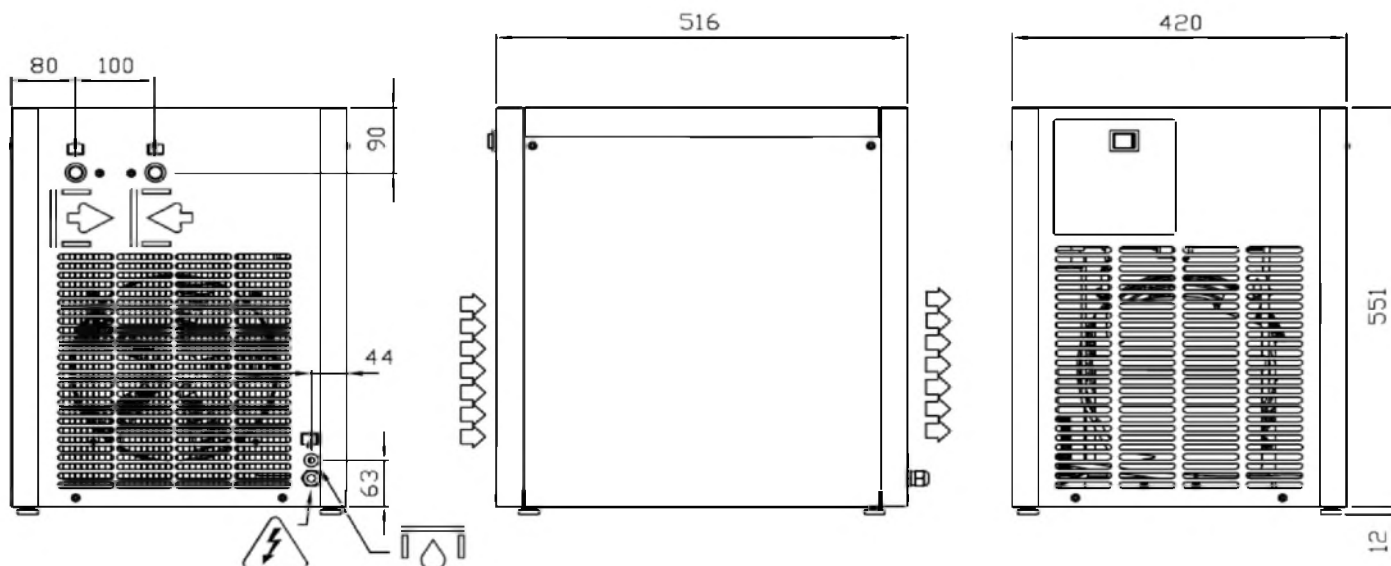



TECHNICAL DATA SHEET

CODE:
08L.0225AG0.00B0
Rev.5A Pg.1/1

REFRIGERATED COMPRESSED AIR DRYER

MODEL:

ED 225 230/1/50

Rated capacity*



Flow rate	m ³ /h	225	
	l/min	3750	
	cfm	132,4	
Inlet air temperature	°C / °F	35 / 95	(Max 55 / 131)
Outlet air temperature	°C / °F	27 / 81	(Max 47 / 117)
Ambient temperature	°C / °F	25 / 77	(Max 45 / 113)
Working pressure	bar / psi	7,0 / 101,5	(Max 16 / 232)
Pressure drop	bar / psi	0,17 / 2,47	(Max 0,34 / 4,93)
Pressure dew point	°C / °F	3 / 37	
Power supply	V/Ph/Hz	230/1/50	(±10% / -- / ±1)
Rated power consumption	kW	0,6	(Max 0,84)
Rated adsorption	A	2,7	(Max 3,82)
Lock Rotor Ampere	A	17	
Weight	Kg / Lbs	48 / 106	
Air connections	IN/OUT	1"BSP	
Coolant type	Freon	R134a	

Standard features

Control panel:	Electronic system type	Separator type:	Demister type
Condenser cooling:	Air cooled	Compressor type:	Hermetic type
Ventilator motor:	Suction fan	Installation location:	Indoor
Heat exchanger:	Aluminium brazed plate	Drain discharge:	Timed solenoid valve
Expansion method:	Capillary tube	Electric protection:	IP 42

* Performances refer to air suction of FAD 20°C (68°F), 1 bar (14.5 psig), and the following operating conditions: 7 bar (100 psig) working pressure, 3°C (37°F) pressure dewpoint, 25°C (77°F) ambient temperature, 35°C (95°F) compressed air inlet temperature.

Performances & specifications: +/- 5%

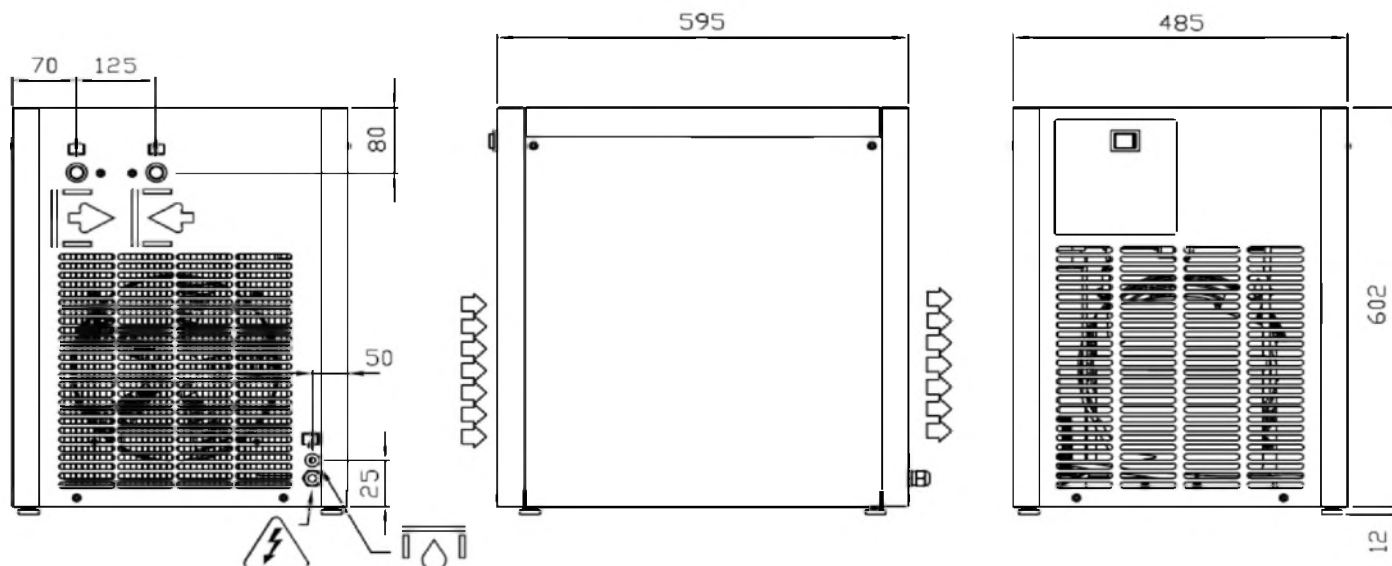



TECHNICAL DATA SHEET

CODE:
08L.0260AG0.00B0
Rev.5A Pg.1/1

REFRIGERATED COMPRESSED AIR DRYER

MODEL:

ED 260 230/1/50

Rated capacity*



Flow rate	m ³ /h	260	
	l/min	4333	
	cfm	153,0	
Inlet air temperature	°C / °F	35 / 95	(Max 55 / 131)
Outlet air temperature	°C / °F	27 / 81	(Max 47 / 117)
Ambient temperature	°C / °F	25 / 77	(Max 45 / 113)
Working pressure	bar / psi	7,0 / 101,5	(Max 16 / 232)
Pressure drop	bar / psi	0,23 / 3,34	(Max 0,34 / 4,93)
Pressure dew point	°C / °F	3 / 37	
Power supply	V/Ph/Hz	230/1/50	(±10% / -- / ±1)
Rated power consumption	kW	0,6	(Max 0,84)
Rated adsorption	A	2,7	(Max 3,82)
Lock Rotor Ampere	A	17	
Weight	Kg / Lbs	49 / 108	
Air connections	IN/OUT	1"BSP	
Coolant type	Freon	R407C	

Standard features

Control panel:	Electronic system type	Separator type:	Demister type
Condenser cooling:	Air cooled	Compressor type:	Hermetic type
Ventilator motor:	Suction fan	Installation location:	Indoor
Heat exchanger:	Aluminium brazed plate	Drain discharge:	Timed solenoid valve
Expansion method:	Capillary tube	Electric protection:	IP 42

* Performances refer to air suction of FAD 20°C (68°F), 1 bar (14.5 psig), and the following operating conditions: 7 bar (100 psig) working pressure, 3°C (37°F) pressure dewpoint, 25°C (77°F) ambient temperature, 35°C (95°F) compressed air inlet temperature.

Performances & specifications: +/- 5%

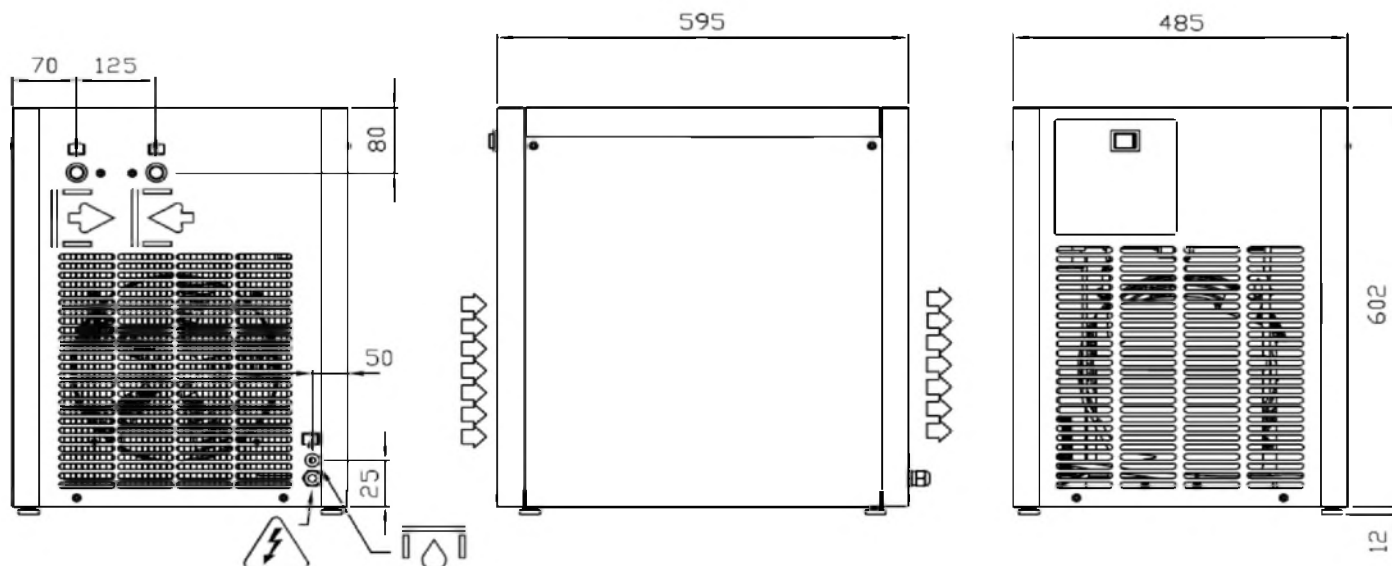



TECHNICAL DATA SHEET

CODE:
08L.0360AG0.00B0
Rev.5A Pg.1/1

REFRIGERATED COMPRESSED AIR DRYER

MODEL:

ED 360 230/1/50

Rated capacity*



Flow rate	m ³ /h	360	
	l/min	6000	
	cfm	211,9	
Inlet air temperature	°C / °F	35 / 95	(Max 55 / 131)
Outlet air temperature	°C / °F	27 / 81	(Max 47 / 117)
Ambient temperature	°C / °F	25 / 77	(Max 45 / 113)
Working pressure	bar / psi	7,0 / 101,5	(Max 16 / 232)
Pressure drop	bar / psi	0,17 / 2,47	(Max 0,34 / 4,93)
Pressure dew point	°C / °F	3 / 37	
Power supply	V/Ph/Hz	230/1/50	(±10% / -- / ±1)
Rated power consumption	kW	0,9	(Max 1,28)
Rated adsorption	A	4,6	(Max 6)
Lock Rotor Ampere	A	28	
Weight	Kg / Lbs	79 / 174	
Air connections	IN/OUT	1 1/2"BSP	
Coolant type	Freon	R407C	

Standard features

Control panel:	Electronic system type	Separator type:	Demister type
Condenser cooling:	Air cooled	Compressor type:	Hermetic type
Ventilator motor:	Suction fan	Installation location:	Indoor
Heat exchanger:	Aluminium brazed plate	Drain discharge:	Timed solenoid valve
Expansion method:	Capillary tube + by-pass	Electric protection:	IP 42

* Performances refer to air suction of FAD 20°C (68°F), 1 bar (14.5 psig), and the following operating conditions: 7 bar (100 psig) working pressure, 3°C (37°F) pressure dewpoint, 25°C (77°F) ambient temperature, 35°C (95°F) compressed air inlet temperature.

Performances & specifications: +/- 5%

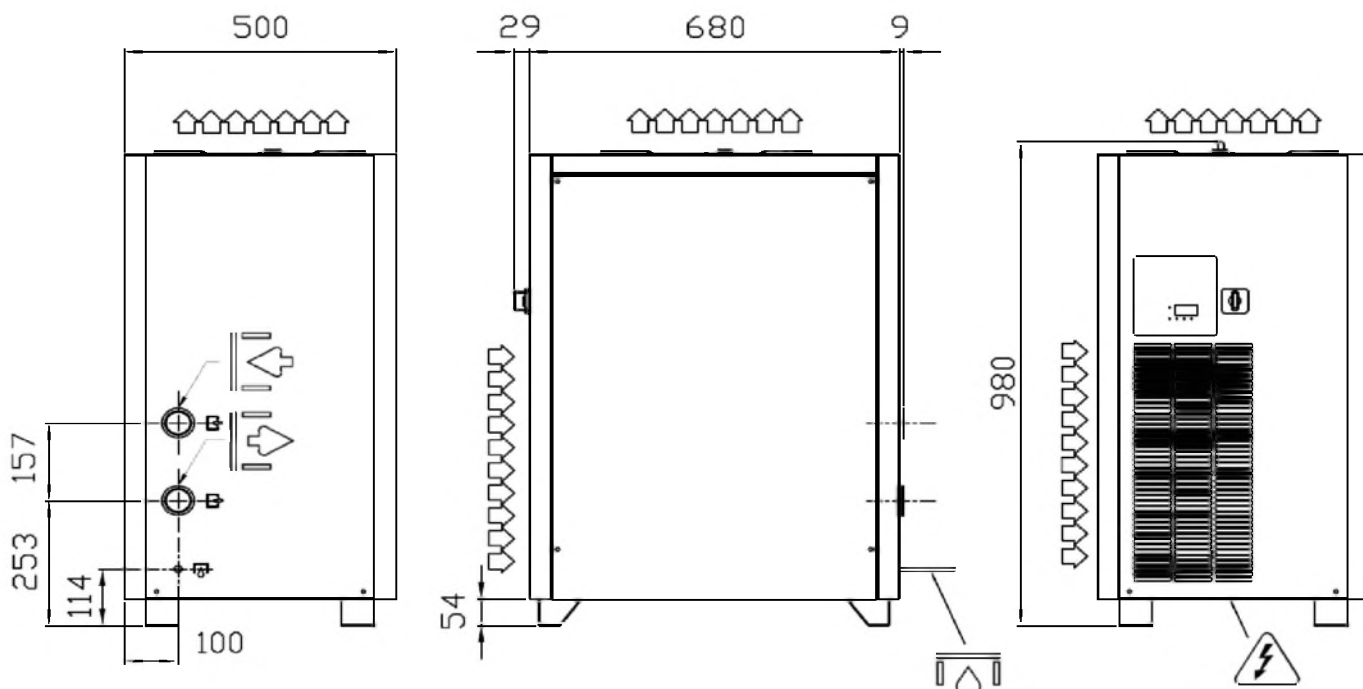

REFRIGERATED COMPRESSED AIR DRYER

MODEL:

ED 480 230/1/50

Rated capacity*



Flow rate	m ³ /h	480	
	l/min	8000	
	cfm	282,5	
Inlet air temperature	°C / °F	35 / 95	(Max 55 / 131)
Outlet air temperature	°C / °F	27 / 81	(Max 47 / 117)
Ambient temperature	°C / °F	25 / 77	(Max 45 / 113)
Working pressure	bar / psi	7,0 / 101,5	(Max 16 / 232)
Pressure drop	bar / psi	0,3 / 4,35	(Max 0,34 / 4,93)
Pressure dew point	°C / °F	3 / 37	
Power supply	V/Ph/Hz	230/1/50	(±10% / -- / ±1)
Rated power consumption	kW	1,24	(Max 1,73)
Rated adsorption	A	5,9	(Max 8,4)
Lock Rotor Ampere	A	33	
Weight	Kg / Lbs	85 / 187	
Air connections	IN/OUT	1 1/2"BSP	
Coolant type	Freon	R407C	

Standard features

Control panel:	Electronic system type	Separator type:	Demister type
Condenser cooling:	Air cooled	Compressor type:	Hermetic type
Ventilator motor:	Suction fan	Installation location:	Indoor
Heat exchanger:	Aluminium brazed plate	Drain discharge:	Timed solenoid valve
Expansion method:	Capillary tube + by-pass	Electric protection:	IP 42

* Performances refer to air suction of FAD 20°C (68°F), 1 bar (14.5 psig), and the following operating conditions: 7 bar (100 psig) working pressure, 3°C (37°F) pressure dewpoint, 25°C (77°F) ambient temperature, 35°C (95°F) compressed air inlet temperature.

Performances & specifications: +/- 5%

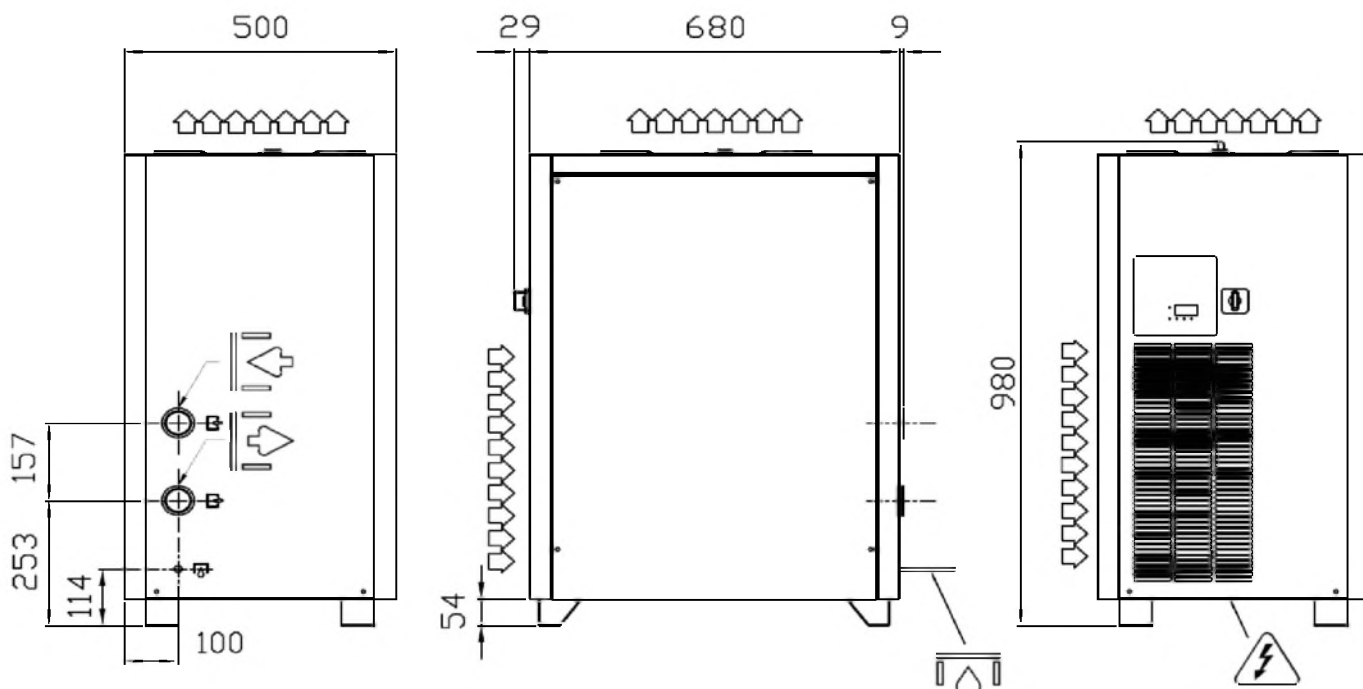



TECHNICAL DATA SHEET

CODE:
08L.0660AG0.00B0
Rev.5A Pg.1/1

REFRIGERATED COMPRESSED AIR DRYER

MODEL:

ED 660 230/1/50

Rated capacity*


Flow rate	m ³ /h	660	
	l/min	11000	
	cfm	388,5	
Inlet air temperature	°C / °F	35 / 95	(Max 55 / 131)
Outlet air temperature	°C / °F	27 / 81	(Max 47 / 117)
Ambient temperature	°C / °F	25 / 77	(Max 45 / 113)
Working pressure	bar / psi	7,0 / 101,5	(Max 16 / 232)
Pressure drop	bar / psi	0,21 / 3,05	(Max 0,34 / 4,93)
Pressure dew point	°C / °F	3 / 37	
Power supply	V/Ph/Hz	230/1/50	(±10% / -- / ±1)
Rated power consumption	kW	1,24	(Max 1,73)
Rated adsorption	A	5,9	(Max 8,4)
Lock Rotor Ampere	A	33	
Weight	Kg / Lbs	134 / 295	
Air connections	IN/OUT	2"BSP	
Coolant type	Freon	R407C	

Standard features

Control panel:	Electronic system type	Separator type:	Demister type
Condenser cooling:	Air cooled	Compressor type:	Hermetic type
Ventilator motor:	Suction fan	Installation location:	Indoor
Heat exchanger:	Aluminium brazed plate	Drain discharge:	Timed solenoid valve
Expansion method:	Capillary tube + by-pass	Electric protection:	IP 42

* Performances refer to air suction of FAD 20°C (68°F), 1 bar (14.5 psig), and the following operating conditions: 7 bar (100 psig) working pressure, 3°C (37°F) pressure dewpoint, 25°C (77°F) ambient temperature, 35°C (95°F) compressed air inlet temperature.

Performances & specifications: +/- 5%

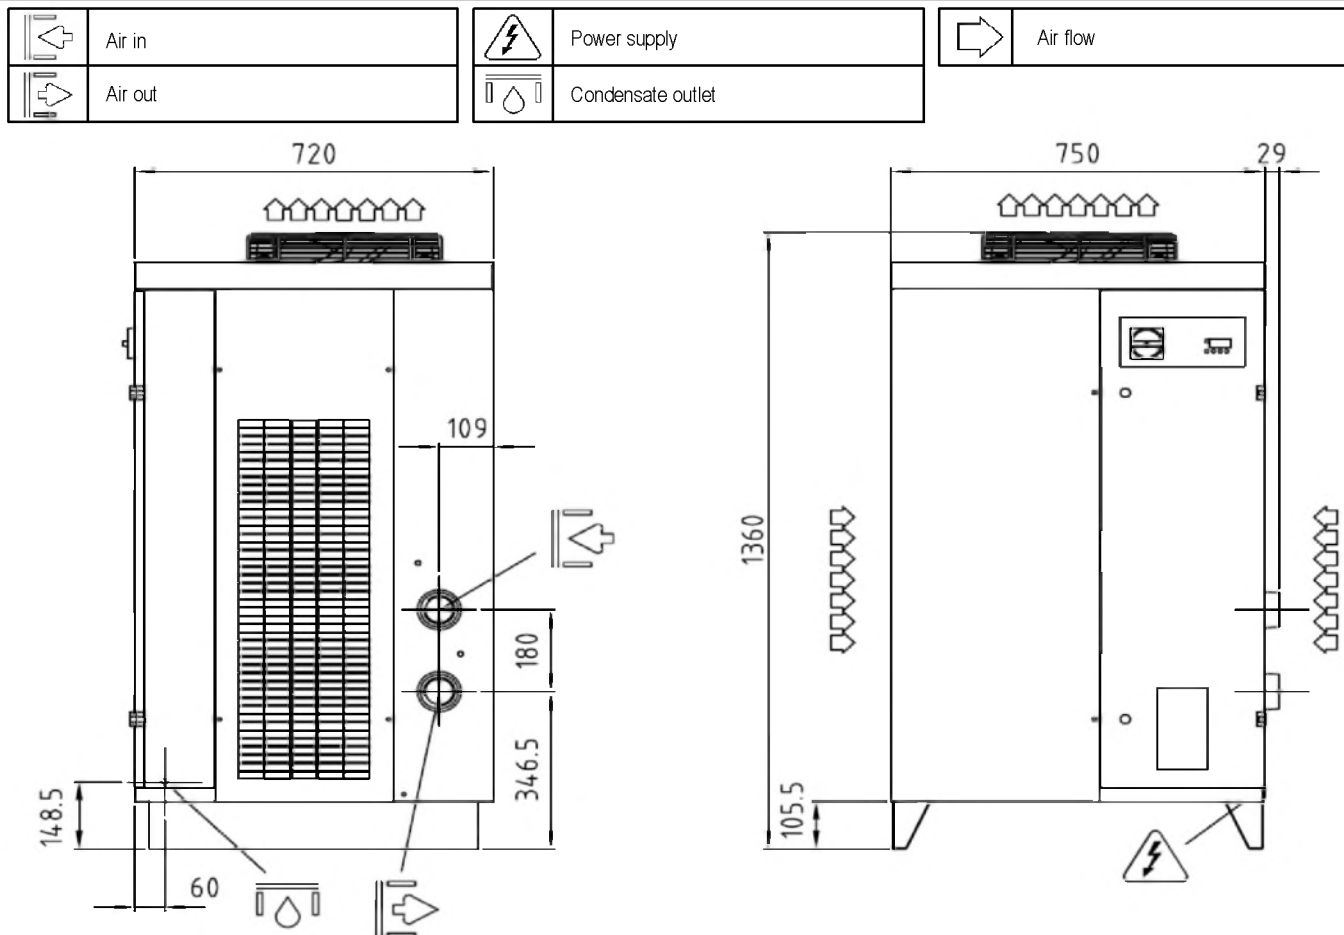

REFRIGERATED COMPRESSED AIR DRYER

MODEL:

ED 780 400/3/50

Rated capacity*


Flow rate	m ³ /h	780	
	l/min	13000	
	cfm	459,1	
Inlet air temperature	°C / °F	35 / 95	(Max 55 / 131)
Outlet air temperature	°C / °F	27 / 81	(Max 47 / 117)
Ambient temperature	°C / °F	25 / 77	(Max 45 / 113)
Working pressure	bar / psi	7,0 / 101,5	(Max 16 / 232)
Pressure drop	bar / psi	0,29 / 4,21	(Max 0,34 / 4,93)
Pressure dew point	°C / °F	3 / 37	
Power supply	V/Ph/Hz	400/3/50	(±10% / -- / ±1)
Rated power consumption	kW	1,9	(Max 3,47)
Rated adsorption	A	3,55	(Max 5,49)
Lock Rotor Ampere	A	45	
Weight	Kg / Lbs	164 / 362	
Air connections	IN/OUT	2"BSP	
Coolant type	Freon	R407C	

Standard features

Control panel:	Electronic system type	Separator type:	Demister type
Condenser cooling:	Air cooled	Compressor type:	Hermetic type
Ventilator motor:	Suction fan	Installation location:	Indoor
Heat exchanger:	Aluminium brazed plate	Drain discharge:	Timed solenoid valve
Expansion method:	Capillary tube + by-pass	Electric protection:	IP 42

* Performances refer to air suction of FAD 20°C (68°F), 1 bar (14.5 psig), and the following operating conditions: 7 bar (100 psig) working pressure, 3°C (37°F) pressure dewpoint, 25°C (77°F) ambient temperature, 35°C (95°F) compressed air inlet temperature.

Performances & specifications: +/- 5%

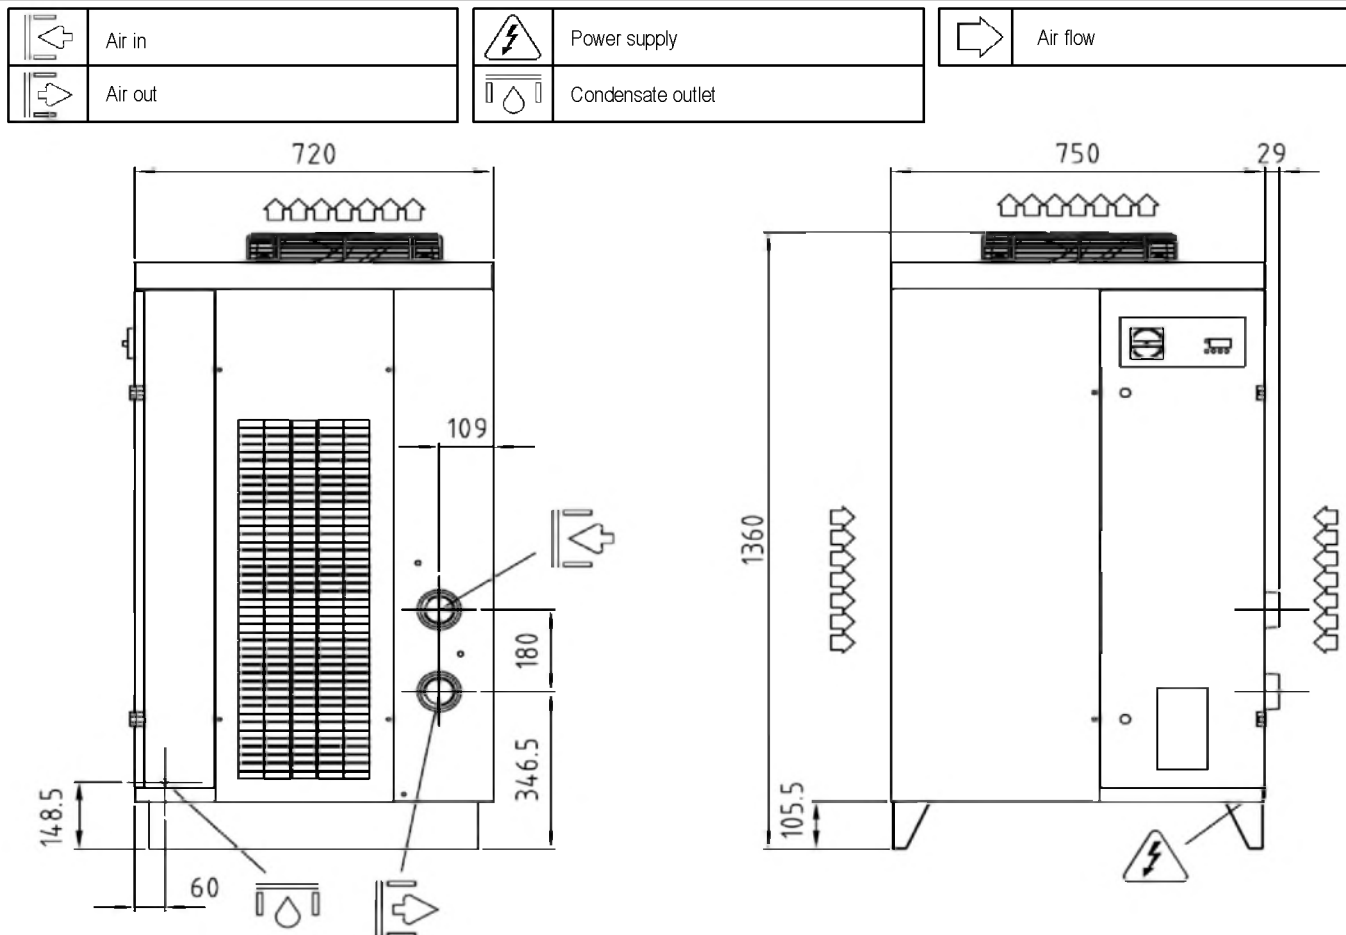

REFRIGERATED COMPRESSED AIR DRYER

MODEL:

ED 1000 400/3/50

Rated capacity*


Flow rate	m ³ /h	1000	
	l/min	16667	
	cfm	588,6	
Inlet air temperature	°C / °F	35 / 95	(Max 55 / 131)
Outlet air temperature	°C / °F	27 / 81	(Max 47 / 117)
Ambient temperature	°C / °F	25 / 77	(Max 45 / 113)
Working pressure	bar / psi	7,0 / 101,5	(Max 13 / 189)
Pressure drop	bar / psi	0,3 / 4,35	(Max 0,34 / 4,93)
Pressure dew point	°C / °F	3 / 37	
Power supply	V/Ph/Hz	400/3/50	(±10% / -- / ±1)
Rated power consumption	kW	1,9	(Max 3,47)
Rated adsorption	A	3,55	(Max 5,49)
Lock Rotor Ampere	A	45	
Weight	Kg / Lbs	168 / 370	
Air connections	IN/OUT	2"BSP	
Coolant type	Freon	R407C	

Standard features

Control panel:	Electronic system type	Separator type:	Demister type
Condenser cooling:	Air cooled	Compressor type:	Hermetic type
Ventilator motor:	Suction fan	Installation location:	Indoor
Heat exchanger:	Aluminium brazed plate	Drain discharge:	Timed solenoid valve
Expansion method:	Capillary tube + by-pass	Electric protection:	IP 42

* Performances refer to air suction of FAD 20°C (68°F), 1 bar (14.5 psig), and the following operating conditions: 7 bar (100 psig) working pressure, 3°C (37°F) pressure dewpoint, 25°C (77°F) ambient temperature, 35°C (95°F) compressed air inlet temperature.

Performances & specifications: +/- 5%

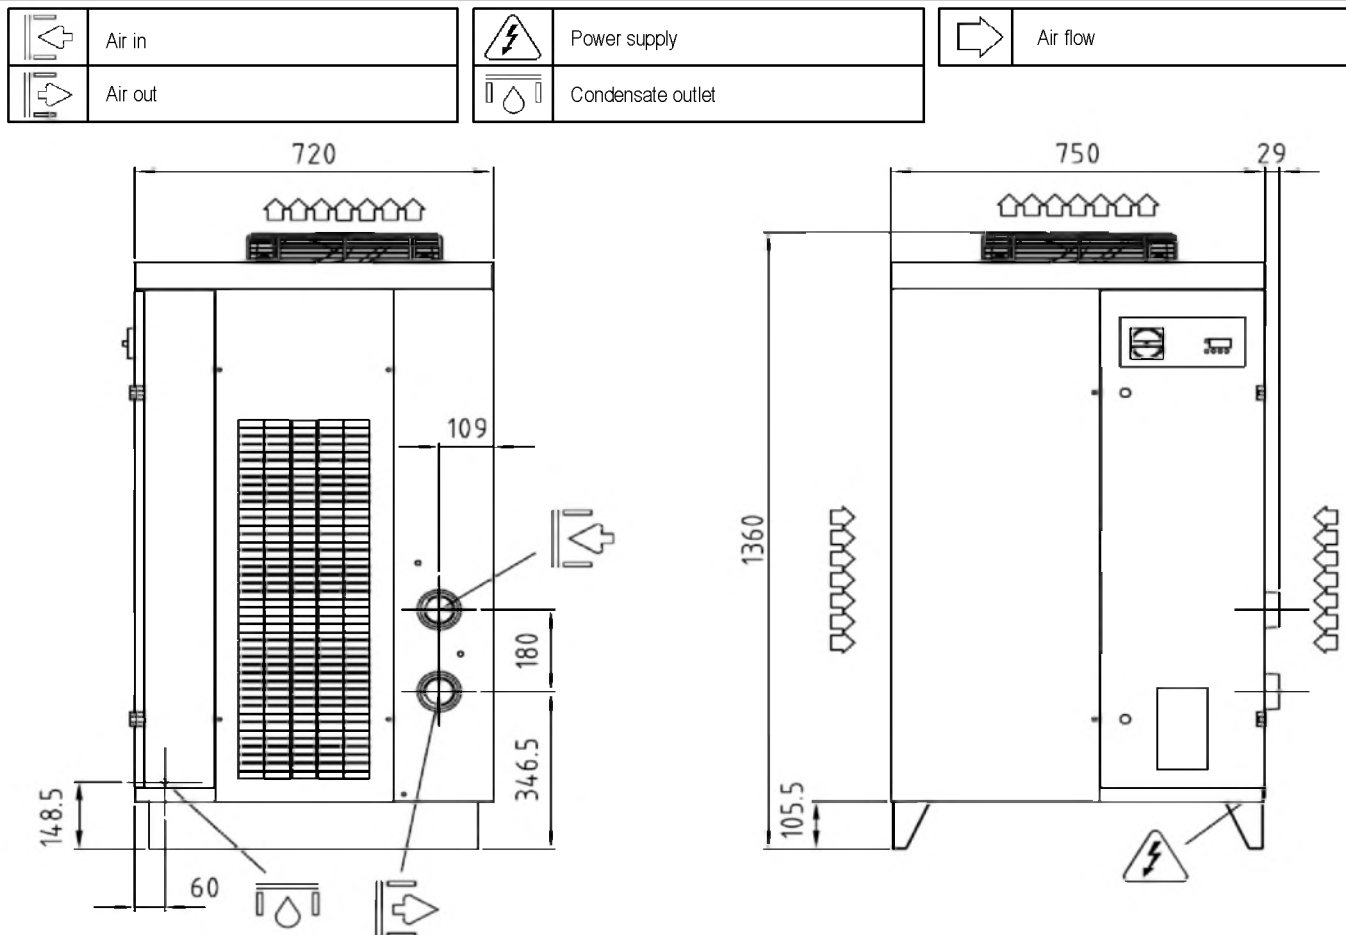

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

www.omi.nt-rt.ru || oim@nt-rt.ru